213nm Nd:YVO₄ q-switched picosecond laser MC Microchip laser system



DESCRIPTION

213nm laser is the laser with shortest wavelength among ULaser's products. It is a deep uv laser, which is based on Nd:YVO₄. 550ps and 600ps are optional.

Our 213nm laser has narrow laser pulse width and high pulse repetition frequency. Compact laser head makes 213nm laser integrate easily. Our 213nm laser is compatible with internal and external triggers.

Our 213nm laser can replace ArF excimer laser in lots of areas. It performs well in industry, like laser ablation and marking. Our 213nm laser can also be used in some precision field like fabrication of fiber Bragg grating, photolithography process and so on.


FEATURES


- Pulse energy up to 180µJ
- High polarization direction stability
- Beam mode is TEM
- Fully sealed design, high reliability


APPLICATIONS

- Seed source
- Laser ultrasonic testin
- Optical parametric oscillation pump source
- Micromachining
- Laser ionization mass spectrometry
- Laser induced breakdown spectroscopy

OUTLINE SIZE(mm)

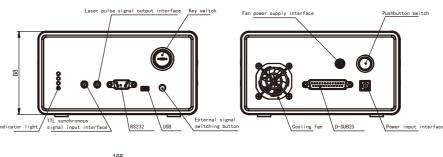






Ulaser











PARAMETERS

Model		UL213-1kHz-4µJ-MC
Optical parameter	Wavelength (nm)	213
	Repetition frequency (kHz)	1*
	Average power (mW)	4
	Output energy (µJ)	4
	Pulse width (ps)	650
	Power stability (8h)	±3%
	Beam mode	TEM00
	Full-angle divergence angle Typ. (Mrad) level $@1/e^2$	5
	Vertical @1/e ²	5
	Polarization characteristics	>100:1
System parameters	System power consumption (W)	≤25
	Power input	100-240 VAC,50/60
	Control interface	RS232、USB
	Power supply size (W×H×L, mm)	168×88×140
	Laser head size (W×H×L, mm)	45×30×120
	Working temperature (°C)	15-35
	Storage temperature (°C)	0-60

1. * the light outlet of the laser head is side outlet. Please refer to the mechanical dimension drawing for details.

2. the built-in beam expanding function can be customized to meet the requirements of small divergence angle (less than 2mrad).





Ulaser

1C001
OHz